


Gazebo GZ634

Assembly Instructions



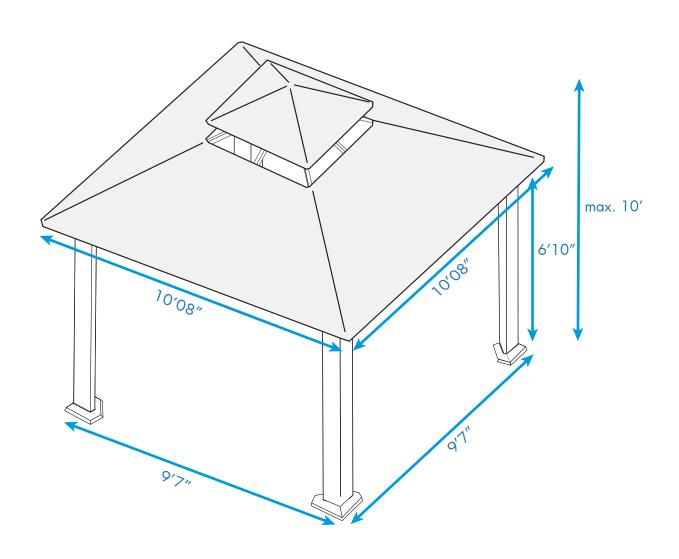

Paragon Group USA

Customer Service: (877) 782 4482 Email:cs-outdoors@paragongroupusa.com

Introduction



Thank you for purchasing the Gazebo GZ634.

When properly assembled and maintained, this gazebo will provide many years of enjoyment! These instructions include helpful hints and important information needed to safely assemble and properly maintain the gazebo. Please read these instructions completely before you begin.

Our patented gazebo has been designed for easy assembly. All steps can be completed by a team of <u>three people</u>. The assembly should take about two hours.

Before Starting Assembly:

CAREFULLY READ ALL THE INSTRUCTIONS BEFORE YOU BEGIN AND FOLLOW THE STEPS IN THE ORDER THEY ARE PRESENTED.

Make sure you have all the necessary parts:
 Compare the contents of the cartons to the List of Parts. If any parts are missing or damaged, or you

have any questions, please contact Customer service: (877)782 4482 before beginning assembly.

2. Lay the parts out in separate staging areas:

The List of Parts has the corresponding step number referenced to each part. We recommend that while you go through the list, make staging areas for each step and place the parts necessary for each step in these areas. This will save you time and effort during assembly.

3. Select a Location:

Wherselecting a location for your gazebo, a flat level area is essential and if possible with proper water drainage and easy access to power and water, if neccessary. Choose a sunny, level position away from overhanging trees and power lines and protected from the wind as much as possible. Locate under ground pipes or cables before preparing the site or anchoring the gazebo.

Note: You may assemble the gazebo on a hard level surface and move it to its final location when finished. Make sure that there are no obstacles between the assembly area and the final position.

4. Prepare a Foundation:

After choosing a location, proper preparation of the site is recommended. The site must be level. If the site is not level, create a base slightly larger than the outside dimensions of the gazebo using a perimeter of two by fours filled with either soil, sod or gravel. Make sure the base is square by measuring the diagonals from both directions and making sure they are equal. The gazebo is secured with pegs into holes cast with concrete. If you decide to have a concrete base, it is best to contact a reliable contractor to make sure it is flat and level. Make sure you have checked with your local authorities regarding any required building permits.

5. Make sure you have the proper tools:

Tape Measure
 2 Small Step Ladders

Work Gloves
 Wooden Mallet

Safety goggles
 Scissors

• Phillips Screwdriver • Liquid soap or WD40 Lubricant

Spirit Level
 Hex Key (included)

NOTE: A cordless drill with Phillips head bit is highly recommended but not essential.

Safety Advice


- The gazebo must be positioned and fixed on a flat level surface.
- Dispose of all plastic bags safely. Keep them out of the reach of children.
- Keep children and pets away from the assembly area until the work is completed.
- Always wear shoes, gloves and safety goggles when working.
- Do not touch overhead power lines with the aluminium profiles.
- Do not attempt to assemble the gazebo in windy or wet conditions.
- Do not position your gazebo in an area exposed to excessive wind.
- If using power tools or a ladder, always follow the manufacturers safety instructions.
- Hot items such as recently used grills, blowtorches etc. must not be stored in the gazebo.
- Make sure the gazebo complies with local building codes.

Table of Contents

Introduc	tion	2
Table o	Contents	3
List of P	arts	4
Step 1	Assembling the Corner Profiles	6
Step 2	Assembling the Roof Profiles	8
Step 3	Attaching the Roof Profiles to Corner Profiles	9
Step 4	Securing the Gaze zo the Ground	11
Step 5	Attaching the Corner Roof Gables	12
Step 6	Attaching the Center Roof Gables	15
Step 7	Placing the Canopy	16

General Order of Assembly

- Step 1: Assembling the Corner profiles
- Step 2: Assembling the Roof Profiles
- Step 3: Attaching the Roof Profiles to the Corner Profiles
- Step 4: Securing the gazebo to the ground
- Step 5: Attaching the Corner Roof Gables
- Step 6: Attaching the Center Roof Gables
- Step 7: Placing the Canopy

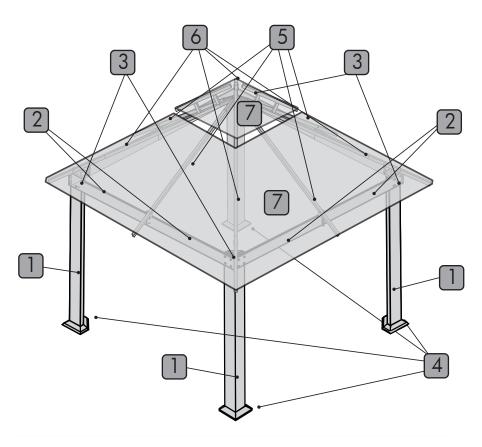

List of Parts



The gazebo is shipped in two cartons. These cartons are heavy. Be careful when lifting them. Wear proper safety gear including work shoes, gloves and goggles. The parts are identified by removable stickers. Place all the parts for each step in staging areas, checking that you have all parts as you go. If any parts are missing or damaged, contact customer service before beginning assembly: Customer Service: (877) 782 4482 Email:cs-outdoors@paragongroupusa.com

No.	Part	Qty	Step	No.	Part	Qty	Step
1		4	1	6A		2	5
2		4	1	7		4	5
3		4	1	8		4	6
4A		4	2	9		2	5,7
4B		4	2	10		1	5
5		4	5	11	Fabric canopy	1	7
6		2	5	12	Fabric canopy	1	7

No.	Part	Qty	Step
13	0 1/4" × 35	32	3
14	1/4" x 15	24	1,2,5
15	1/4"	8	5,6
16		8	1,2

No.	Part	Qty	Step
17	1/4" × 30	16	1,5,6
18		4	2
19	1/4"	1	
20	8.0 × 70mm	12	4
21		12	4


We included some extra screws and bolts for your convenience.


STEP 1 Assembling the Corner Profiles




Place all the parts on a level surface. Make sure the pieces are in the correct positions before assembling.

Carefully follow the order of assembly to ensure an easy installation. Wear proper safety gear including work shoes, gloves and goggles.




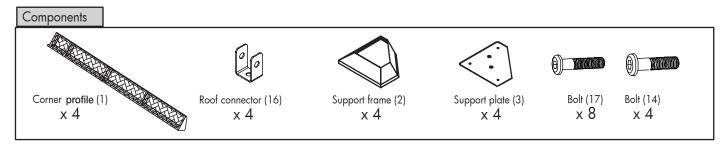

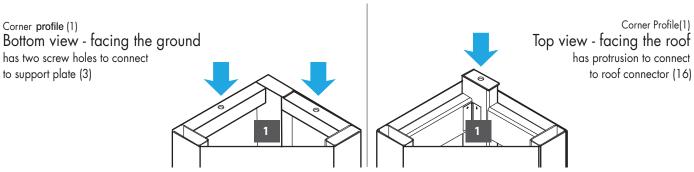


1.A


Place corner profiles (1) parallel to each other the ground. Attach roof connectors (16) to each corner profile using bolts (14). Prepare all four profile.

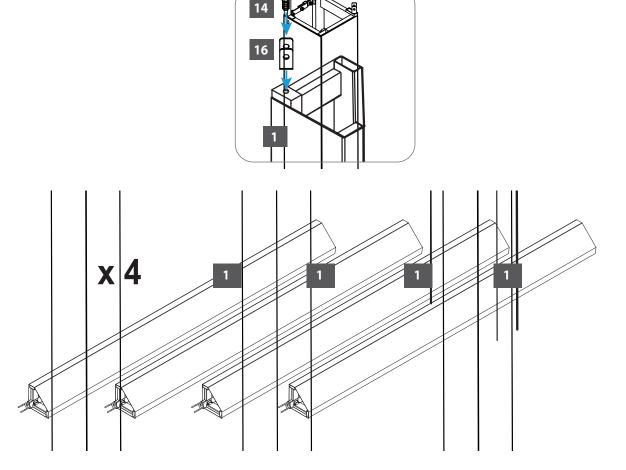


Slide support frames (2) over lower end of corner profiles(1).


Attach support plates (3) to corner profiles as shown, using two bolts (17) for each plate.





Leave support frames (2) about 10" over lower end of corner profiles (1) until step 4.




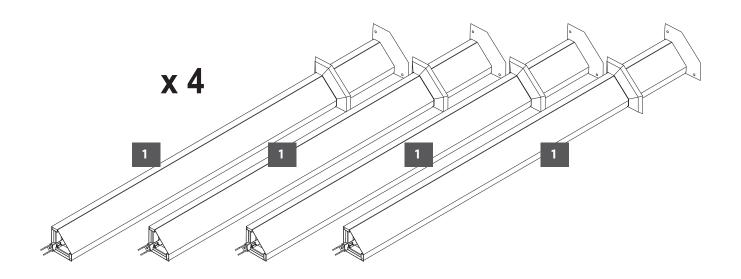



STEP 2 Assembling the Roof Profiles




Connect each roof profile (4A) to one roof profile (4B) by sliding protruding parts on profile (4A) into open side of profile (4B) as shown. Fasten with bolts (14).

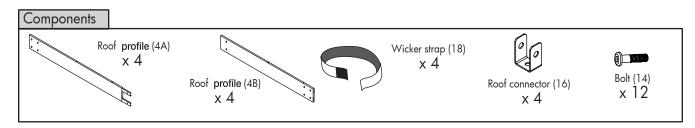



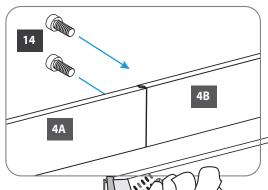

Wrap wicker strap (18) around connection edges of roof profiles (4A, 4B) as shown and fasten.

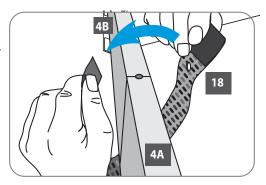

Attach roof connectors (16) to each roof profile (4A) through hole in wicker strap, as shown, using bolts (14).


Create four sets.


STEP 3 Attaching Roof Profiles to Corner Profiles


Attach one long roof **profile** set (4A+4B) to two corner **profiles** (1) as shown. Fasten with four bolts (13) on each side.



NOTE: The end of **profile** (4B) protrudes from corner **profile** (1) the distance of it's own width.



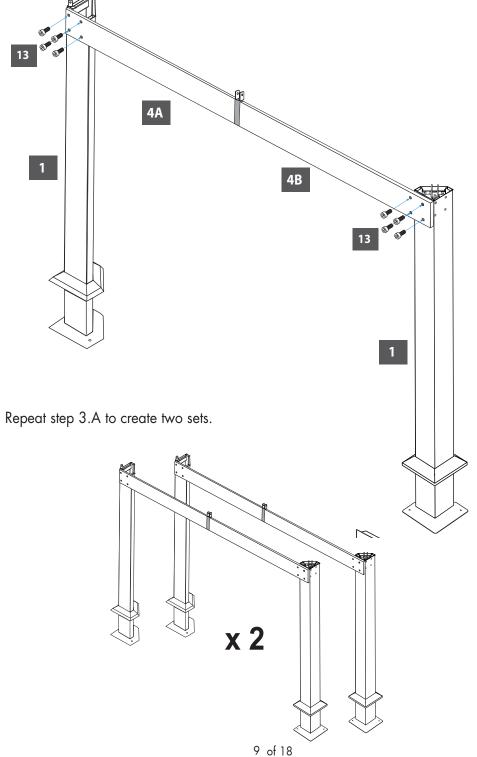

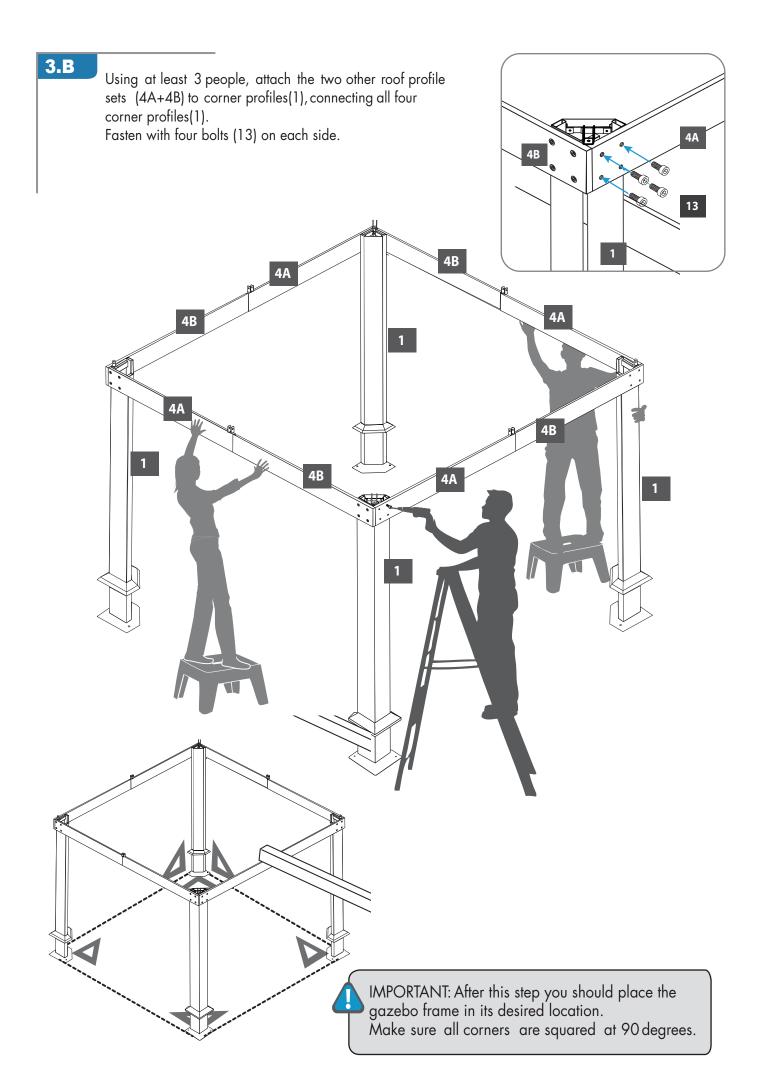



STEP 4 Securing the Gazebo to the Ground




4.A

Fasten the gazebo frame to the ground, using three spikes (21) for each support plate. Lower support frames (2) to cover support plates (3).










Optional Securing the Gazebo to a Concrete Floor or Wood Deck


Concrete Floor:


- 1. Using an electric concrete drill, drill holes into the concrete **floor**, corresponding to the holes in support plates (3).
- 2. Insert concrete bolts (20) into the holes and hammer into place, using a mallet.
- 3. Fasten concrete bolts with washers and nuts.













Wood Deck:

- 1. Using an electric wood drill, drill holes into the wood **floor**, corresponding to the holes in support plates (2).
- 2. Insert wood screws with washers (not supplied) into the holes and fasten, using an electric screw driver.





NOTE: After securing the gazebo to the ground, we highly recommend filling the corner profiles (1) with 2 bags (20LBs each) of Pea Gravel each for extra stability.





STEP 5 Attaching the Corner Roof Gables




IMPORTANT:

The roof gable profiles(5) have small protrusions(springbuttons) underneath. The end with the protrusions is connected to the top gable connector (10). The roof gable extension (6A) has a small protrusion underneath which will snap into one of the holes in roof gable extension(9) while stretching the canopy.

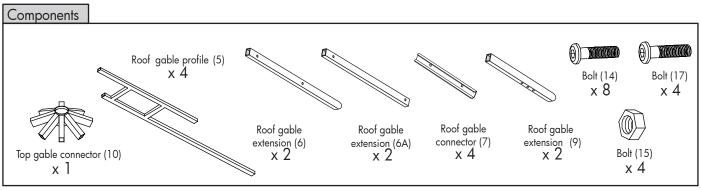


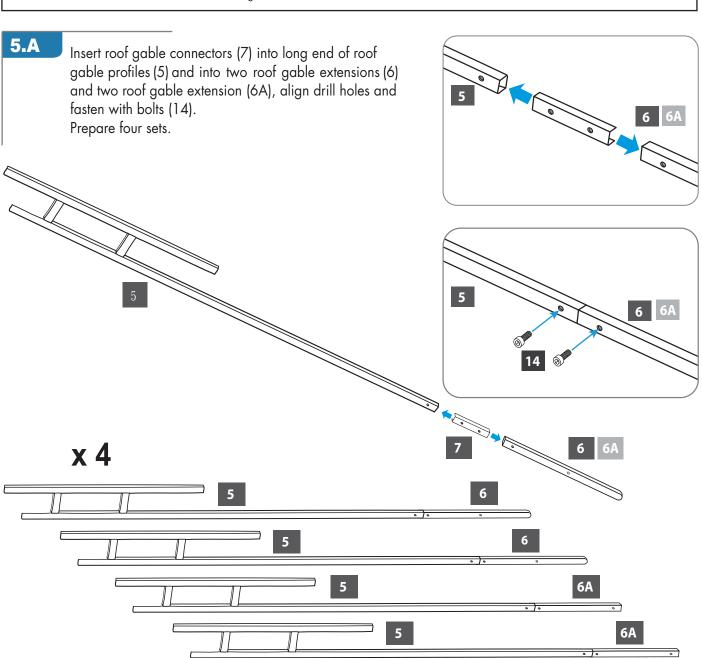


Connect one roof gable profiles assembly (5,6) and one roof gable profiles assembly (5,6A) to top gable connector (10) until the small protrusion on their undersides snap into the holes on the underside of top gable connector (10).

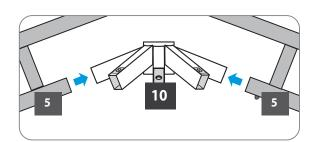


ATTENTION: The tunnels of top gable connector (10) are marked, in order to avoid mistakes when inserting the roof gable profiles.

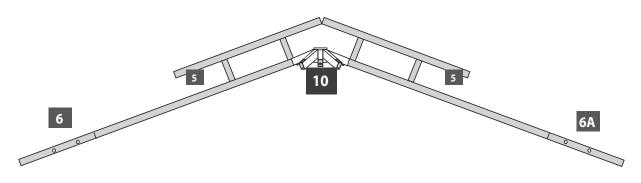



Using at least two people, connect the two roof gable profiles (5,6) and (5,6A) to roof connectors (16) on opposite corner profiles (1). Fasten with bolts (17,15) as shown.

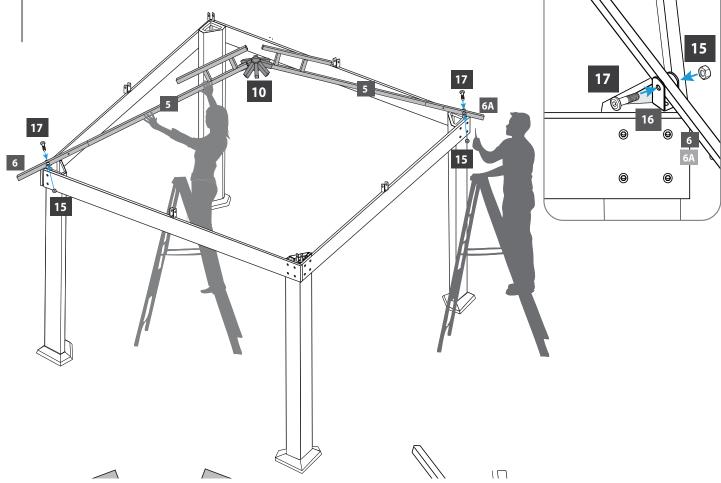

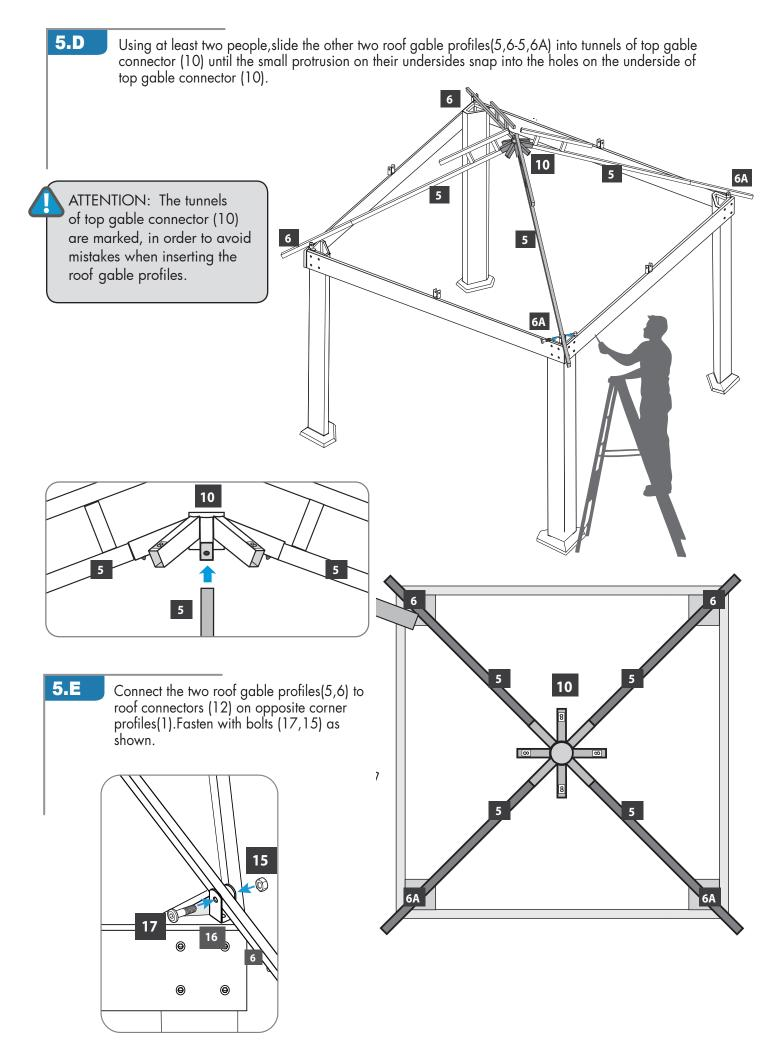

5.F Slide roof gable extension (9) over roof gable extensions (6A) until the small protrusion on its underside snaps into the third hole on the underside of roof gable extension (9).

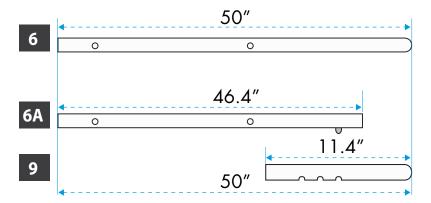



NOTE: You will need to extend profile(9) outwards to stretch the roof canopy into its final position.


STEP 6 Attaching the Center Roof Gables

4


IMPORTANT: The roof gable profiles(8) have small protrusions(springbuttons) underneath.


The end with the protrusions is connected to the top gable connector (10).



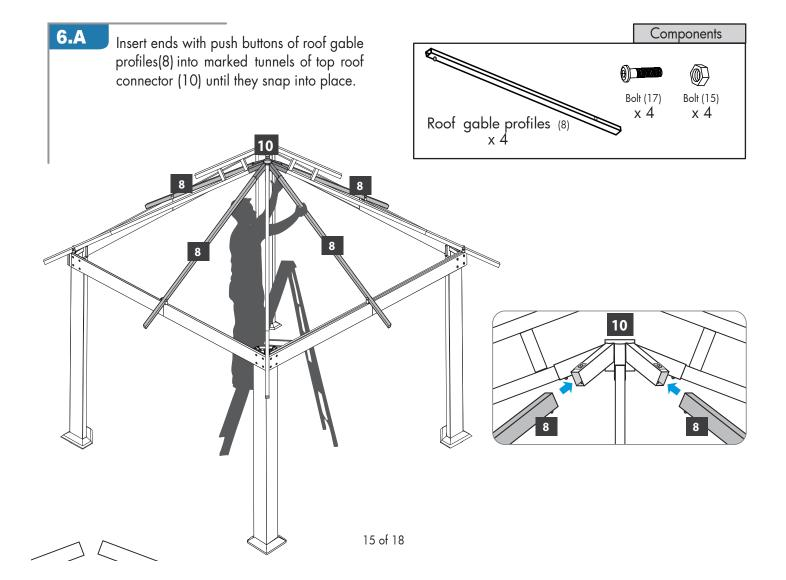

6.B Place the other ends of roof gable connectors (8) into roof connectors (16) on roof profiles (4B), align drill holes and fasten with bolts (17,15).






STEP 7 Placing the Canopy


WARNING!!: When inserting the roof profiles in to the fabric pockets of the canopy, you MUST use both hands holding the large piece of roof fabric in order to stretch it. Don't try to stretch it and pull it just by pulling the pockets! It will tear the pockets as Sunbrella fabric is not elastic by nature.



Components


7.A Place the upper fabric canopy (11) carefully over the higher part of roof gable profiles(5), stretch and slide profiles into fabric pockets in canopy(11). into the pocket.

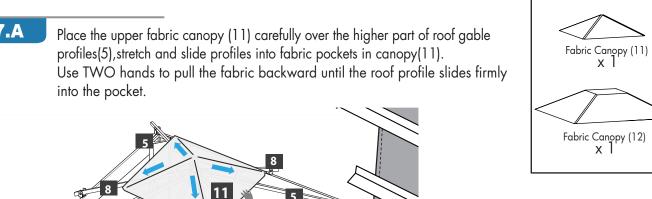








Using at least two people, place the large canopy (12) carefully over the small canopy (11) and two roof gable profiles(5,6)as shown. Stretch the canopy and slide profiles into fabric pockets in large canopy rim(12). Use TWO hands to pull the fabric backward until the roof profiles slide firmly into the pockets.

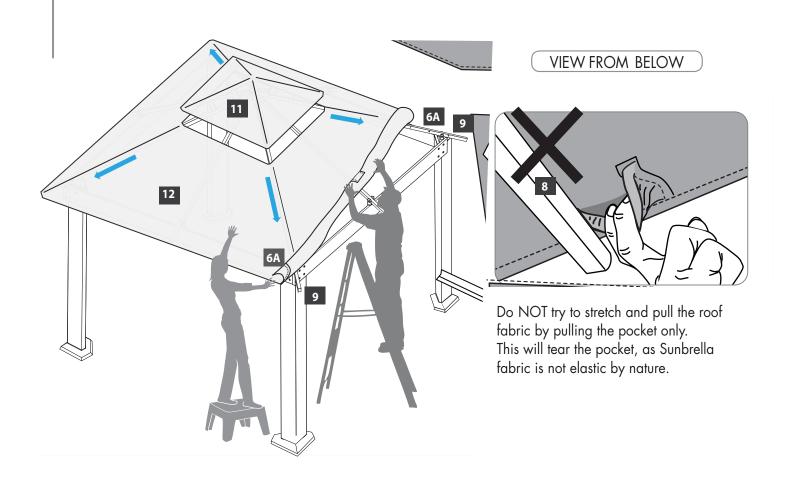

VIEW FROM BELOW





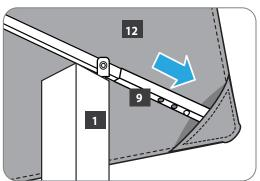

To finish stretching the canopy, press the push button in extension profile (6A) and extend extension profile (9) as far as possible to the outside until the push button snaps into place.



Gazebo GZ634

Assembly Instructions

WARRANTY:

Warranty covers damage due to manufacturing defects only. Warranty does not cover weather inflicted damage (Force Majeure) and/or damages caused by not following assembly instructions and adhering to warnings in manual.

WARNING: In order to prevent possible damage to fabric and/or structure, fabric roof should be removed before wind storms, or major inclement weather events.

